

# INTERNET COOPERATION TREATY

## PCT

### NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Assistant Commissioner for Patents  
United States Patent and Trademark  
Office  
Box PCT  
Washington, D.C. 20231  
ÉTATS-UNIS D'AMÉRIQUE

in its capacity as elected Office

<b>Date of mailing (day/month/year)</b> 21 December 1999 (21.12.99)	
<b>International application No.</b> PCT/KR99/00233	<b>Applicant's or agent's file reference</b> TH-10872-PCT
<b>International filing date (day/month/year)</b> 12 May 1999 (12.05.99)	<b>Priority date (day/month/year)</b> 12 May 1998 (12.05.98)
<b>Applicant</b> TAK, Seung, Ho	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:

25 November 1999 (25.11.99)

☐ in a notice effecting later election filed with the International Bureau on:
2. The election ☒ was
☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

<b>The International Bureau of WIPO</b> 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No.: (41-22) 740.14.35	<b>Authorized officer</b>  Juan Cruz Telephone No.: (41-22) 338.83.38
--	--




# PATENT COOPERATION TREATY

WO 99/58987  
PCT/KR99/00233

From the INTERNATIONAL BUREAU

To:

LEE, Young, Pil  
The Cheonghwa Building  
1571-18 Seocho-dong  
Seocho-gu  
Seoul 137-073  
RÉPUBLIQUE DE CORÉE



## NOTICE INFORMING THE APPLICANT OF THE COMMUNICATION OF THE INTERNATIONAL APPLICATION TO THE DESIGNATED OFFICES

(PCT Rule 47.1(c), first sentence)

Date of mailing (day/month/year) 18 November 1999 (18.11.99)		
Applicant's or agent's file reference TH-10872-PCT		IMPORTANT NOTICE
International application No. PCT/KR99/00233	International filing date (day/month/year) 12 May 1999 (12.05.99)	
Priority date (day/month/year) 12 May 1998 (12.05.98)		
Applicant TAK, Seung, Ho		

1. Notice is hereby given that the International Bureau has communicated, as provided in Article 20, the international application to the following designated Offices on the date indicated above as the date of mailing of this Notice:  
AU,CN,EP,IL,JP,KP,US

In accordance with Rule 47.1(c), third sentence, those Offices will accept the present Notice as conclusive evidence that the communication of the international application has duly taken place on the date of mailing indicated above and no copy of the international application is required to be furnished by the applicant to the designated Office(s).

2. The following designated Offices have waived the requirement for such a communication at this time:

AL,AM,AP,AT,AZ,BA,BB,BG,BR,BY,CA,CH,CU,CZ,DE,DK,EA,EE,ES,FI,GB,GD,GE,GH,GM,HR,HU,  
ID,IN,IS,KE,KG,KZ,LC,LK,LR,LS,LT,LU,LV,MD,MG,MK,MN,MW,MX,NO,NZ,OA,PL,PT,RO,RU,SD,  
SE,SG,SI,SK,SL,TJ,TM,TR,TT,UA,UG,UZ,VN,YU,ZW

The communication will be made to those Offices only upon their request. Furthermore, those Offices do not require the applicant to furnish a copy of the international application (Rule 49.1(a-bis)).

3. Enclosed with this Notice is a copy of the international application as published by the International Bureau on  
18 November 1999 (18.11.99) under No. WO 99/58987

### REMINDER REGARDING CHAPTER II (Article 31(2)(a) and Rule 54.2)

If the applicant wishes to postpone entry into the national phase until 30 months (or later in some Offices) from the priority date, a demand for international preliminary examination must be filed with the competent International Preliminary Examining Authority before the expiration of 19 months from the priority date.

It is the applicant's sole responsibility to monitor the 19-month time limit.

Note that only an applicant who is a national or resident of a PCT Contracting State which is bound by Chapter II has the right to file a demand for international preliminary examination.

### REMINDER REGARDING ENTRY INTO THE NATIONAL PHASE (Article 22 or 39(1))

If the applicant wishes to proceed with the international application in the national phase, he must, within 20 months or 30 months, or later in some Offices, perform the acts referred to therein before each designated or elected Office.

For further important information on the time limits and acts to be performed for entering the national phase, see the Annex to Form PCT/IB/301 (Notification of Receipt of Record Copy) and Volume II of the PCT Applicant's Guide.


The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No. (41-22) 740.14.35	Authorized officer J. Zahra Telephone No. (41-22) 338.83.38
--	---

# PATENT COOPERATION TREATY

## PCT

### INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

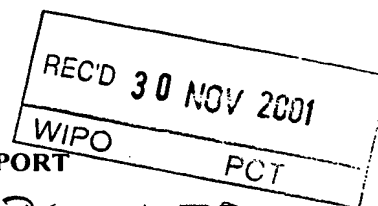

9/700159

Applicant's or agent's file reference <b>TH-10872-PCT</b>	<b>FOR FURTHER ACTION</b> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. <b>PCT/KR 99/00233</b>	International filing date (day/month/year) <b>12 May 1999 (12.05.1999)</b>	Priority Date (day/month/year) <b>12 May 1998 (12.05.1998)</b>
International Patent Classification (IPC) or national classification and IPC <b>IPC<sup>7</sup>: G01R 1/00, 11/00, 21/00, 22/00</b>		
Applicant <b>TAK Seung Ho</b>		
<b>RECEIVED</b> <b>FEB 19 2002</b> <b>Technology Center 2100</b>		

1. This international preliminary examination report has been prepared by this International Preliminary Examination Authority and is transmitted to the applicant according to Article 36.

2. This REPORT consists of a total of 4 sheets, including this cover sheet.

☐ This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of \_\_\_\_\_ sheets.

3. This report contains indications relating to the following items:

- I. ☒ Basis of the opinion
- II. ☐ Priority
- III. ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV. ☐ Lack of unity of invention
- V. ☒ Reasoned statement under Rule 66.2(a)(ii) with regard to novelty, inventive step or industrial applicability: citations and explanations supporting such statement
- VI. ☐ Certain documents cited
- VII. ☐ Certain defects in the international application
- VIII. ☒ Certain observations on the international application

Date of submission of the demand <b>25 November 1999 (25.11.1999)</b>	Date of completion of this report <b>11 August 2000 (11.08.2000)</b>
Name and mailing address of the IPEA/AT <b>Austrian Patent Office Kohlmarkt 8-10 A-1014 Vienna Facsimile No. 1/53424/200</b>	Authorized officer <b>MAYER T.</b>  Telephone No. 1/53424/452

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/KR 99/00233

**I. Basis of the report**1. With regard to the **elements** of the international application:\*

- ☒ the international application as originally filed
- ☐ the description:  
pages \_\_\_\_\_. as originally filed  
pages \_\_\_\_\_. filed with the demand  
pages \_\_\_\_\_. filed with the letter of \_\_\_\_\_.
- ☐ the claims:  
pages \_\_\_\_\_. as originally filed  
pages \_\_\_\_\_. as amended (together with any statement) under Article 19  
pages \_\_\_\_\_. filed with the demand  
pages \_\_\_\_\_. filed with the letter of \_\_\_\_\_.
- ☐ the drawings:  
pages \_\_\_\_\_. as originally filed  
pages \_\_\_\_\_. filed with the demand  
pages \_\_\_\_\_. filed with the letter of \_\_\_\_\_.
- ☐ the sequence listing part of the description:  
pages \_\_\_\_\_. as originally filed  
pages \_\_\_\_\_. filed with the demand  
pages \_\_\_\_\_. filed with the letter of \_\_\_\_\_.

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language \_\_\_\_\_ which is:

- ☐ the language of a translation furnished for the purposes of international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of the translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in printed form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. ☐ The amendments have resulted in the cancellation of:

- ☐ the description, pages \_\_\_\_\_.
- ☐ the claims, Nos. \_\_\_\_\_.
- ☐ the drawings, sheets/fig \_\_\_\_\_.

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2(c)).\*\*

\* Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as „originally filed“ and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17).

\*\* Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.  
PCT/KR 99/00233

## V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

I. Statement			
Novelty (N)	Claims	1-17	YES
	Claims		NO
Inventive step (IS)	Claims	1-17	YES
	Claims		NO
Industrial applicability (IA)	Claims	1-17	YES
	Claims		NO

### Citations and explanations (Rule 70.7)

The document cited in the search report merely disclose the state of the art.  
There is also an inventive step involved.  
The industrial applicability of the claims 1-17 is given since the present application concerns a method for transmitting and storing a value and a value store electric power meter using the same.

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.  
PCT/KR 99/00233

## VIII. Certain observations on the international application

The following observations on the clarity of the claims, description, and drawings or on the question whether the claims are fully supported by the description, are made:

Reference signs in parentheses should be inserted in the claims to increase their intelligibility.



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : G01R 1/30, 11/00, 11/02, 11/04, 11/32, 21/133, 22/00	A1	(11) International Publication Number: <b>WO 99/58987</b> (43) International Publication Date: 18 November 1999 (18.11.99)
--	----	---


(21) International Application Number: PCT/KR99/00233  
(22) International Filing Date: 12 May 1999 (12.05.99)  
(30) Priority Data:  
1998/16964 12 May 1998 (12.05.98) KR  
(71)(72) Applicant and Inventor: TAK, Seung, Ho [KR/KR];  
4-105 Plaza Apt., Kil-dong, Kangdong-gu, Seoul 134-010  
(KR).  
(74) Agent: LEE, Young, Pil; The Cheonghwa Building, 1571-18  
Seocho-dong, Seocho-gu, Seoul 137-073 (KR).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR,  
BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD,  
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP,  
KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN,  
MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK,  
SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW,  
ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG,  
ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ,  
TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI,  
FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent  
(BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE,  
SN, TD, TG).

**Published**

*With international search report.*

(54) Title: METHOD FOR TRANSMITTING AND STORING VALUE AND VALUE STORE ELECTRIC POWER METER USING THE SAME

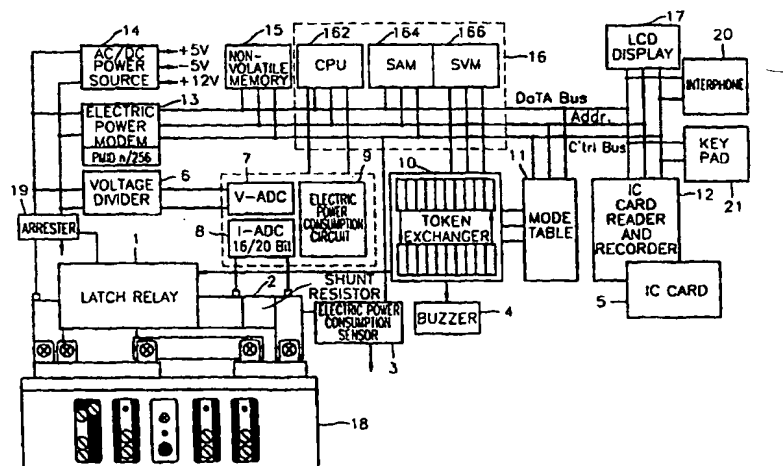

## (57) Abstract

A value store electric power meter is provided. The server of an electric power supplier, an electric power seller, or an electric power reseller transfers value through an electric power line through a built-in electric power modem, stores value received through the electric power modem inside the value store electric power meter in a value store module, reduces a value according to the amount of electric power consumption, omits processes of visually reading a meter, calculating the amount of use, printing and mailing a bill, settling up, and paying an uncollected amount and arrears. Accordingly, it is possible to save electric power supplying costs, to reduce the electric power rate by a user, and maximizing the profit of the electric power supplier. The electric power meter is used for IC card payment type gas and water meters in which the IC card having credit value is transferred and stored in an off-line state. Accordingly, the electric power value and the added value measurement is easily and rapidly performed. Therefore, it is convenient for the user and remarkably reduces all the costs.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						



## METHOD FOR TRANSMITTING AND STORING VALUE AND VALUE STORE ELECTRIC POWER METER USING THE SAME

### Technical Field

5       The present invention relates to a value store electric power meter of a new concept, and more particularly, to a value storing method by which the server of an electric power supplier or an electric power re-seller transmits a value through a power line modem and stores the value in a store value module (SVM) or an IC card and an electric power meter  
10 of advance and direct payments without requiring a metering.

### Background Art

      A conventional watt/hour meter for measuring the amount of consumed electricity per hour in a certain period by a meter man has  
15 been used so far in all institutions consuming electricity such as a home, an office, and a public building. Such a first generation electric power meter is managed in a very complicated and expensive way wherein a meter man visits places in which the electric power meters of homes and businesses are installed and checks the difference between the amount of  
20 power consumed at the previous measurement and the power consumption amount at the measuring point in time, i.e., the amount of consumption in a month or a certain period. A calculation of supply and consumption results is completed by the supplier and a bill is printed and mailed to the consumer after performing a computational process such as  
25 a data input and a calculation of the consumption amount, a consumer taking a request for payment paper and making payment, and processing the request. The bill must be mailed once again for processing arrears and nonpayment.

      As burglars pretending to be meter men have appeared and  
30 measuring costs contribute to a large part of electric power supplying costs due to the increase of the personnel expenses of meter men, a remote measuring electric power meter which is a second generation

product is under consideration as a new measuring method and is currently not widely applied. It is possible to reduce the personnel expenses of meter men by the remote measuring electric power meter. However, the consumption amount every month must be computer  
5 processed, the bill must be mailed, and the arrears must be processed. In particular, the management of the remote measuring electric power meter with respect to gas and water meters, which requires additional power, and communication lines such as a telephone line, or a radio, are avoided by the supplier and the consumer. This is due to the rise in cost  
10 caused by the operation between the gas and water meters, the server of a remote measuring center and the installation and operation of communication equipment according to the addition of a communication function for remote measuring.

Therefore, an IC card payment electric power meter of a third  
15 generation which requires no visual measuring can be considered. The IC card payment electric power meter can solve the problems of the electric power meters of the first and second generations to some extent. However, the effectiveness of the IC card payment electric power meter depends upon how to perform processes of re-charging and calculating  
20 value information in an IC card. In particular, when electric power is cut out due to the complete consumption of the value information on the IC card, an unexpected accident may occur.

#### Disclosure of the Invention

25 It is a first object of the present invention to provide value transmitting and storing methods in which the server of an electric power supplier or an electric power re-seller communicates with value store electric power meters of the respective subscribers, stores value in a store value module (SVM) inside the value store electric power meter  
30 according to the present invention, and transmits added credit value information to and stores added credit value information in an IC card. Accordingly, suppliers or re-sellers create a high added value for

consumers by increasing the effectiveness of management and considerably reducing the price of electric power.

It is a second object of the present invention to provide a value storing method for storing value on the IC card by which it is possible to  
5 use credit value information transmitted through a power line modem with all the meters in homes and factories, such as a gas meter, a water meter, and a calorimeter for measuring heat energy, which are installed and operated on an off-line basis.

It is a third object of the present invention to provide a value store  
10 electric power meter by which it is possible for the electric power supplier or the electric power re-seller to increase the effectiveness of management by communicating with the host of an authenticated agency through the power line modem and transmitting the credit value information to and storing the credit value information in the IC card.

15 Accordingly, it is possible to reduce the price of electric power to consumers by remarkably reducing incidental expenses related to electric power supply and to omit inputting and calculating the amount of consumed electric power during a certain period, through the use of a server for printing bills, and mailing and calculating the bills.

20 It is a fourth object of the present invention to provide a value store electric power meter by which it is possible to completely solve all the problems of the electric power meters of the first, second, and third generations, to swiftly and easily re-charge value, and to charge the added value on the IC card using a value charging channel. Accordingly,  
25 the value store electric power meter can be applied to various meters such as the gas meter, the water meter, and the calorimeter. Accordingly, it is possible to maximize the effectiveness of various businesses.

Accordingly, to achieve the above objects, there is provided a value  
30 store electric power meter for communicating with the server of the electric power supplier through a power line modem included in the electric power meter, storing value information in a value store module

inside the electric power meter, calculating value according to the amount of electric power consumption, and stopping electric power supply when a credit value is completely consumed.

According to an aspect of the present invention, there is provided a  
5 method for storing credit information in a value store module in a value  
store electric power meter by communication between a host and each  
terminal through an electric power modem included in the value store  
electric power meter which is a terminal, comprising the steps of (a) the  
host generating first random data, sending the first random data to a  
10 terminal, generating a session key by a key generating algorithm using a  
terminal intrinsic secret key, generating a first signature value by a  
signature generation algorithm for a comparison during a terminal  
authentication, and the terminal receiving the first random data and  
generating the session key by the same method as the host, (b) the  
15 terminal generating a second signature value by a signature generating  
algorithm and second random data and sending the second random data  
to the host, (c) the host comparing the first and second signature values  
and authenticating the terminal, the host generating a third signature  
value and sending the third signature value to the terminal with  
20 information on an amount of money when the terminal is authenticated  
and the terminal receiving the third signature value and the information on  
the amount of money from the host, generating a fourth signature value,  
and authenticating the host by comparing the third and fourth signature  
values with each other, and (d) the terminal increasing the value by  
25 decoding the information on the amount of money and sending the value  
obtained by encrypting a balance and a terminal ID using an encrypting  
algorithm to the host and the host receiving the encrypted value, decoding  
the encrypted value, comparing the stored terminal ID with the decoded  
terminal ID, authenticating the terminal once again, and backing up the  
30 balance in a record file when the authentication is completed.

According to another aspect of the present invention, there is  
provided a value store electric power meter including an electric power

line input and output terminal for measuring the amount of used electric power, comprising an electric power consumption operating portion for measuring the voltage and current of an electric power line and calculating used electric power, an electric power modem for performing data communication between the host and the terminal through the electric power line, a secure storing portion including a secure access module (SAM) having a CPU and an encryption key and an encryption algorithm for storing value and a store value module (SVM) for storing value, for preventing the fraudulent use of the value information and hacking, excluding a cryptographical attack, and requiring the authorization process of the SAM in requesting a token from the SVM, an on/off latch relay switch for breaking the supply of electric power according to the balance result of the SVM, and a token exchanger for reducing a token from the value information input from the SVM according to the amount of electric power consumed per unit time, the SVM requesting a new token to a token tank when an inner token is exhausted.

Preferably, the value store electric power meter further comprises an IC card reading and recording portion to allow use with other meters such as water, gas, and calory meters by inserting an IC card into the electric power meter, receiving value from the host on-line, recording the received value on the inserted IC card, and reading the received value from the IC card.

Preferably, the IC card reading and recording portion is applied to water, gas, and heat meters employing an IC card method operated in an off-line state by recording added value for things such as gas and water in the IC card through the electric power modem, by which it is possible to store electric power value in the IC card by including a communication port comprised of eight terminals defined by the ISO 7816 Part 2 having Vcc, Clk, DIO, Reset, and Gnd for synchronously and asynchronously communicating with the IC card.

Preferably, the value store electric power meter further comprises an AC/DC converter for supplying an operation voltage required by the

electric power meter, a power consumption sensor for sensing that the electric power is normally used when the output of a sensor is "0" and that terminals are bypassed and the electric power is surreptitiously used when the output of the sensor is "1", and a buzzer for generating an  
5 audible alarm and guiding a user to perform value transfer and storage when a last token is received by requesting a new token from the SVM after the balance of the token exchanger is exhausted.

Preferably, the electric power consumption operating portion comprises a shunt resistor for measuring an amount of AC current, a  
10 voltage divider for serially connecting two resistors and selecting from a voltage range given by the ratios of the two resistors in order to adjust the AC voltage of the electric power line within the range of the input voltage of a voltage meter, an analog to digital converter for converting an AC current signal which flows through the shunt resistor into a digital signal of  
15 16 or 20 bits, and an analog to digital converter for converting an AC voltage into a digital signal of 16 bits, wherein the phase of the voltage is compared with the phase of the current and an angle by which the two phases are different from each other is calculated and output as a signal for applying differential rates.

20 Preferably, the value store electric power meter further comprises an electric power consumption table which is an electric power fee mode table for differentially applying multiple step electric power use rates such as 50%, 75%, 100%, 150%, and 200% according to electric power supply and demand states on the basis of a real time clock comprised of year,  
25 month, time, minute, and second.

Preferably, the value store electric power meter comprises a non-volatile memory storing a characteristic 3 byte ID number and recording an electric power use state during a certain period of hours, days, or months for remotely monitoring the surreptitious or abnormal use of  
30 electric power and performing an electronic sealing function.

Preferably, the value store electric power meter comprises an LCD display for visually displaying the balance of the value, the transfer state

of the value, the real time electric power consumption status, and the accumulative electric power use states.

The value store electric power meter which can be used for simple and sound fee payment means by a SET electronic commercial  
5 transaction process using next generation credit and direct payment cards of EMV '96 mixed with the IC card reader and recorder, further comprises means such as a telephone, an Internet, a P-ATM (EMV '96), and a digital interphone for performing audio communication with a person in charge of the host server or transmitting an audible message to help the  
10 user with matters such as storage and a keypad for a user directly requesting the value to be stored.

Preferably, the electric power input and output terminal of the electric power meter comprising a cover and physical sealing for preventing physical tapping, prevents the surreptitious and abnormal use  
15 of electric power.

Preferably, the value store electric power meter further comprises an arrester circuit for absorbing lightning or a surge voltage on an electric power line of a supplier.

Preferably, the electric power meter can request a voice message  
20 from a person concerned with the service by a speaker and a key pad switch of a digital intercom. Processes of transmitting and storing credit value are facilitated by a person concerned with transmitting the voice message service to a subscriber.

#### 25 Brief Description of the Drawings

The above objects and advantages of the present invention will become more apparent by describing in detail a preferred embodiment thereof with reference to the attached drawings in which:

FIG. 1 is a flowchart illustrating a method for transmitting and  
30 storing value according to the present invention;

FIG. 2 is a flowchart illustrating the flow of multi-step differential charge mode correcting commands (the exchange of an electric power

charge system) by hours, days, months, and seasons applied to a value store electric power meter according to the present invention;

FIG. 3 is a flowchart illustrating processes for monitoring an abnormal consumption of electric power such as conductance and preventing an illegal consumption by comparing the total power used by subscribers to the electric power meter according to the present invention per unit of time, such as days, weeks, or months, with the total amount of electric power consumption per unit time;

FIG. 4 schematically describes a signature generating method and an encryption method applied to the present invention;

FIG. 5 is a block diagram showing the inner structure of the value store electric power meter according to the present invention;

FIG. 6 shows the structure of a system according to the present invention for describing the flow of the value information; and

FIG. 7 is a split perspective view showing the exterior view of the value store electric power meter according to the present invention.

#### Best mode for carrying out the Invention

Hereinafter, a method of transmitting and storing value according to a preferred embodiment of the present invention and the structure and operation of a value store electric power meter without the need for visual measurement by a meter using the same will be described in more detail.

The present invention can be applied to an electric power meter, a gas meter, a water meter, and a calorimeter, employing direct payment and pre-payment calculating methods mixed with an electronic purse method. Here, the present invention will be restricted to the electric power meter for convenience sake. Also, in all the communication processes of transmitting and storing value according to the present invention, a basic encryption algorithm triple-DES is applied. Communication between a server host and an electric power meter terminal is performed as follows. First, a task of making a session key (Ks) is performed in the server and the terminal. An encryption algorithm



triple-DES is applied through the session key. Also, when a task of making a signature is necessary, a MAC CBC using the triple-DES is used. When values are stored in the electric power meter terminal, a value storage, an electric power use calculating mode table, a unit charge, and a time to be corrected are stored. When values are read from the electric power meter terminal, the credit balance, date, month, and year use details, the electric power use calculating mode table, the unit charge, and timer hours are read, thereby providing information to detect abnormal use.

First, before describing the method for transmitting and storing value according to the present invention, examples of the signature generation and the encryption algorithm applied thereto will be described hereinafter with reference to FIG. 4.

After the task of making the session key (Ks) is performed in the server and the terminal through communication between the server and the value store electric power meter, the encryption algorithm triple-DES is applied through the session key (Ks). The MAC CBC using the triple-DES can be used for the task of signature generation. Hereinafter, the signature generation and the encryption algorithm will be described in more detail with reference to FIG. 4.

For the signature generation, the magnitudes of original data are made multiples of 64 bits by applying padding in step 1. These are  $D_1, \dots$ , and  $D_N$  of FIG. 4. In step 2, the data values ( $D_n$ ) of the 64 bits are F encrypted, applying triple-DES, according to an input key (K). Signature values are  $O_1, \dots$ , and  $O_N$  of step 3. At this time, values obtained by adding the respective data values ( $D_n$ ) to signature values ( $O_{N-1}$ ) except for a first signature value  $O_1$  are F encrypted.

For the encryption, the magnitudes of original data are made multiples of 64 bits by applying padding in step 1. These are  $D_1, \dots$ , and  $D_N$ . In step 2, the triple-DES algorithm is applied to the F encryption. The encrypted messages are  $O_1 + \dots + O_N$  of step 3.

A master key (KH) of the host, an intrinsic secret key (KT) of each

terminal, and a secret session key ( $K_s$ ), used in a communication process, each having a magnitude of 128 bits, are used. The terminal intrinsic key ( $K_T$ ) is generated from the master key ( $K_H$ ) of the host. The session key ( $K_s$ ) is generated from the terminal intrinsic key ( $K_T$ ). The  
5 master key of the host ( $K_H$ ) and the terminal intrinsic key ( $K_T$ ) are arbitrarily selected from various sets.

The terminal intrinsic key ( $K_T$ ) is generated by encrypting the ID of the terminal by the triple-DES algorithm using the master key ( $K_H$ ) of the host. An intrinsic key is stored in the terminal in a generation step and is  
10 generated in the host in an initial stage of communication. Namely,  $K_T = \text{Encrypt}(\text{ID}, K_H)$ .

The session key ( $K_s$ ) is generated by encrypting random numbers  $R$  generated in the host by the triple-DES algorithm using the terminal intrinsic key ( $K_T$ ) whenever communication is performed. All the  
15 encryptions are performed using the session key ( $K_s$ ) in the communication process. Namely,  $K_s = \text{Encrypt}(R, K_T)$ .

In the present invention, algorithms of (1) a value store command, (2) a differential charge mode control command based on hours, days, months or seasons), and (3) use during days, weeks, or months and timer  
20 information check command (abnormal monitoring are adopted) are adopted. These will be described with reference to FIGs. 1 through 3.

First, the flow of the value store command will be described with reference to FIG. 1.

STEP 10: The host generates first random data ( $R_1$ ,  $R_2$ , and  $n$ )  
25 and sends the first random data to the terminal. The session key is generated by the key generation algorithm using the terminal intrinsic secret key ( $K_T[n]$ ). Namely,  $K_s = \text{Encrypt}(R_1, K_T[n])$ . For comparison during a terminal authentication, a first signature value  $S1h = \text{Sig}(R_2, K_s)$  is generated by the signature generation algorithm. The terminal receives  
30 the first random data ( $R_1$ ,  $R_2$ , and  $n$ ) and generates the session key as done in the host using the terminal intrinsic secret key ( $K_T[n]$ ). Namely,  $K_s = \text{Encrypt}(R_1, K_T[n])$ .

STEP 12: The terminal generates a second signature value  $S1t = \text{Sig}(R2, Ks)$  by the signature generation algorithm, generates second random data  $R3$ , and sends  $S1t$  and  $R3$  to the host.

STEP 14: The host can authenticate the terminal by comparing  
5  $S1h$  with  $S1t$ . When the terminal is authenticated, the host generates a third signature value  $S2h = \text{Sig}(H+R3+EnAmnt, Ks)$  and sends  $S2h$  to the terminal with encrypted total amount of money information ( $EnAmnt$ ). Here,  $H$  is a header representing the value store command. The terminal generates a fourth signature value  $S2t = \text{Sig}(H+R3+EnAmnt, Ks)$  and  
10 authenticates the host by comparing  $S2h$  with  $S2t$ .

STEP 16: When the host is authenticated, the terminal increases the value, encrypts  $\text{Balance} + \text{ID}$  as  $M = \text{Encrypt}(\text{Balance}+\text{ID}, Ks)$ , and sends the encrypted value  $M$  to the host. The host authenticates the terminal once again by decoding the encrypted value  $M$  as  
15  $\text{Balance}' + \text{ID}' = \text{Decrypt}(M, Ks)$  and comparing  $\text{ID}'$  with  $\text{ID}$ . When the terminal is authenticated, the balance is stored on a record file.

The flow of the differential charge mode control command based on hours, days, months, and seasons (the charge system) will be described with reference to FIG. 2.

20 STEP 20: The host generates the first random data ( $R1$ ,  $R2$ , and  $n$ ) and sends the first random data to the terminal. The session key is generated by the key generation algorithm using the secret key ( $KT[n]$ ). Namely,  $Ks = \text{Encrypt}(R1, KT[n])$ . For the comparison during the terminal authentication, the first signature value  $S1h = \text{Sig}(R2, Ks)$  is generated by  
25 the signature generation algorithm. The terminal receives the first random data ( $R1$ ,  $R2$ , and  $n$ ) and generates the session key in the same way as the host using the terminal intrinsic secret key ( $KT[n]$ ). Namely,  $Ks = \text{Encrypt}(R1, KT[n])$ .

STEP 22: The terminal generates the second signature value  
30  $S1t = \text{Sig}(R2, Ks)$  by the signature generation algorithm, generates the second random data ( $R3$ ), and sends  $S1t$  and  $R3$  to the host.

STEP 24: The host can authenticate the terminal by comparing

S1h with S1t. When the terminal is authenticated, the host generates the third signature value  $S2h = \text{Sig} (H+R3+\text{Mode}+\text{Unit}, K_s)$  and sends the third signature value to the terminal together with the mode information and the unit charge information. The terminal generates a fourth signature value  
5  $S2t = \text{Sig} (H+R3+\text{Mode}+\text{Unit}, K_s)$  and authenticates the host by comparing S2h with S2t.

STEP 26: When the host is authenticated, the terminal converts a charge system, encrypts  $\text{Balance}+\text{ID}$  as  $M = \text{Encrypt} (\text{Balance}+\text{ID}, K_s)$  and sends the encrypted value M to the host. The host authenticates the  
10 terminal once again by decoding the encrypted value M as  $\text{Balance}'+\text{ID}' = \text{Decrypt} (M, K_s)$  and comparing ID' with ID. When the terminal is authenticated, the balance is stored on the record file.

Finally, the flow of the use during days, weeks, or months and timer information check command (used in the monitoring of abnormal  
15 use) will be described in detail with reference to FIG. 3.

STEP 30: The host generates the first random data (R1, R2, and n) and sends the first random data to the terminal. The session key is generated by the key generation algorithm using the terminal intrinsic secret key ( $KT[n]$ ). Namely,  $K_s = \text{Encrypt} (R1, KT[n])$ . The first signature  
20 value  $S1h = \text{Sig} (R2, K_s)$  is generated by the signature generation algorithm for the comparison during the terminal authentication. The terminal receives the first random data (R1, R2, and n) and generates the session key as done in the host using the terminal intrinsic secret key ( $KT[n]$ ). Namely,  $K_s = \text{Encrypt} (R1, KT[n])$ .

25 STEP 32: The terminal generates the second signature value  $S1t = \text{Sig} (R2, K_s)$  by the signature generation algorithm, generates the second random data (R3), and sends S1t and R3 to the host.

STEP 34: The host can authenticate the terminal by comparing S1h with S1t. When the terminal is authenticated, the host generates the  
30 third signature value  $S2h = \text{Sig} (H+R3+\text{Time}, K_s)$  and sends the third signature value to the terminal together with Time. The terminal generates a fourth signature value  $S2t = \text{Sig} (H+R3+\text{Time}, K_s)$  and

authenticates the host by comparing S2h with S2t.

STEP 36: When the host is authenticated, the terminal encrypts an information file (Info) including use details (Log), a differential charge mode table (ModeTB), a terminal time (Timer), the balance (Balance), and  
5 the ID.

Namely, the terminal encrypts the Info by  $M = \text{Encrypt}(\text{Info}, K_s)$  and sends the encrypted value M to the host. Here,  
 $\text{Info} = \text{Log} + \text{ModeTB} + \text{Balance} + \text{ID}$ . The host authenticates the terminal once again by decoding the encrypted value M by  $\text{Info}' = \text{Decrypt}(M, K_s)$  and  
10 comparing ID' with ID. When the terminal is authenticated, the use during days, weeks, or months and timer information is backed up on the record file and checked.

The value transmit and store encryption algorithm applied to the present invention was described as mentioned above. In order to be  
15 applied to a real electric power meter, the following items must be considered.

The maximum number of the value store electric power meters which can be connected to one pole transformer is restricted to 256. In a pole transformer for converting 3.3KV into 220V supply voltage, one local  
20 service & surveillance unit (LS) manages 250 value store electric power meters. LSs having different serial numbers are connected to the second side of the various pole transformers. One area service & surveillance unit (AS) connected to a maximum of 256 LSs can manage 65536 value store electric power meters. In managing the 256 LSs, one local server in  
25 a tree structure can manage up to 16,000,000 ASs. However, considering the performance and efficiency of the server, it is preferable that the maximum number of the value store electric power meters managed by the local server be restricted. An ID of 3 bytes is given to a general power line modem user and to the electric power meter modem  
30 (micom) for the case in which a signal goes over the pole transformer to the other side of 220V. A micom having a bus scrambling function protects an encryption algorithm and an encryption key, prevents

appropriation, or can selectively use a secure access module (SAM) which is an IC card of a subscriber identification module (SIM) type. An electric power amount calculation, a token tank, and a display can be performed using an additional microcontroller. At this time, it is checked  
5 whether the control of the LCD display and the electric power use calculation is hindered when the electric power amount meter communicates with the host. It is considered that there is a time limit in providing time information to the electric power meter. Namely, when it is assumed that it takes one second to transfer time information to a family,  
10 it takes one hour to transfer the time information to 3,600 families. A real time clock is loaded in the electric power meter and differential charges are applied according to the times. The clock time is corrected and monitored at all times. The abnormal use of electric power is monitored or digital sealing is used for a case in which tapping or hacking is  
15 performed by connecting the power line modem to a PC.

The digital sealing is systematically realized by compounding software and hardware. The digital sealing for monitoring the abnormal use of the electric power is realized by a method in which the terminal transmits details of the used power amount at a point in time, for a period  
20 of hours days, weeks, or years to the server as 2.44 kilobyte of information. The server records the information in a database, compares the recorded information with the information to be transmitted at the next point in time, and compares the comparison result with the total amount of used electric power for the same period. When a voltage is applied to  
25 an output terminal at the state where a latch relay cuts off electric power, it is determined to be a surreptitious use of electricity. Accordingly, emergency information is transmitted to the server.

The total of the electric power use details of the server can be utilized as a basis for making an agreement on prices advantageous to a  
30 re-contract by applying a reserve ratio during the purchasing of the electric power by estimating the electricity use for period of days, months, or seasons on the basis of the total amount of electric power used for a

period of hours, days, months, or seasons.

When a circuit breaker breaks the supply of electric power due to the stored credit value becoming exhausted, a break by over current, a break in a special case, or the use of the electric power by tapping a power source at the front end of the meter, the abnormal use of electric power, is detected by a method of checking the presence of a load voltage.

The credit value is transmitted and stored in the electric power meter, the gas meter, the water meter, and the calorimeter via the power line modem. The electric power credit value is stored in the SVM and the remaining values are stored in the respective regions of the IC card electronic purse.

Hereinafter, the structure and operation of the electric power meter, made considering the above items, will be described in more detail with reference to FIGs. 5 through 7.

FIG. 5 shows the electric power meter which transmits and stores value information through the electric power line modem. In FIG. 5, a latch relay 1 is an on/off latch type relay switch for breaking the supply of the electric power. A shunt resistor 2 measures an alternating current (AC) by a manganese (Mn) resistance of  $0.1\text{m}\Omega$ . When the latch relay 1 is broken, a power consumption sensor 3 senses normal use when the output of the sensor is "0" and that terminals 1s and 1L are bypassed and the electric power is surreptitiously used when the output of the sensor is "1". A buzzer 4 requests a new token of credit value to the SVM after the balance of a token exchanger 10 is consumed and generates an audible alarm, thus guiding the credit value transmission and storage by an electric power user. A credit value/added value storage IC card 5 registers the card serial number (CSN) of a subscriber IC card on a management database by the master key of the electric power re-seller managing the credit value store electric power meter according to the present invention and checks the presence of a registered legal CSN when the server is requested to transmit credit value, thus preventing the

illegal use of electric power.

A voltage divider 6 adjusts 117, 220, and 240V AC voltages to be within the input voltage range of a voltage analog to digital converter (V-ADC). The range of the voltage is selected by the ratio of two resistors which are serially connected. A V-ADC 7 is a circuit for converting an AC voltage analog signal into a 16 bit digital signal. A current analog to digital converter (I-ADC) 8 is a circuit for converting an AC current signal which flows through the shunt resistor 2 into a 16 or 20 bit digital signal. An electric power consumption operating circuit 9 calculates the electric power (Watt) by multiplying the digital signal of the V-ADC 7 by the digital signal of the I-ADC 8 and converts the multiplication result into a pulse number and width signal. The electric power consumption operating circuit 9 compares the phase of the voltage with the phase of the current, calculates an angle by which the two phases are different, and outputs a phase difference as a signal, thus applying differential charges to the things which temporarily use induction load. The token exchanger 10 reduces tokens according to the amount (Watt/hour) of the electric power consumed per unit time, requests new tokens from a ten unit token tank when the tokens inside the token exchanger 10 are consumed, and reduces the new tokens according to the amount of power consumption. If the ten unit token tank is consumed, 100 unit tokens are requested for the SVM to be described later and the 10 unit token tank is filled again. The tokens requested for the SVM 166 can be received through the authentication process of the SAM 164. An RTC and power consumption table 11 performs a differential operation of multi-step electric power charges according to an electric power supply and demand situation of 50%, 75%, 100%, 150%, and 200% based on a real time clock comprised of year, month, day, hour, minute, and second (YYMMDDHHMMSS).

An IC card reader and recorder 12 conforming to ISO 7816 is a communication port comprised of eight terminals defined by ISO 7816 Part 2 including Vcc, Cik, DIO, Reset, and Gnd for synchronously and asynchronously communicating with the IC card. Multi-purpose credit



values for things such as electric power, gas, water, hot water, heat energy, and pay-TV are recorded on one IC card by inserting a normally issued IC card into the electric power meter in an on line/off lines state. After recording the value transmitted from the gas service server through the value transmit and store electric power meter on the IC card, the IC card is taken out, inserted into the gas meter and the value information is transmitted to the gas meter, thus reducing the value information on the card according to the amount of gas use. Accordingly, the value transmit and store electric power meter can be operated in an off-line state.

10 A power line modem 13 performs data communication through the power line. Each modem is set by one among 256 power line modem ID addresses (PLMID). An AC/DC power source 14 supplies an operation voltage required by the value store electric power meter according to the present invention. The three byte ID which is an intrinsic number of the value store electric power meter is recorded on a ROM during production.

15 A non-volatile memory 15 comprised of a flash memory records an electric power consumption situation during a certain period, i.e., the details of the electric power consumption for 24 hours are found by recording the amount of electric power consumption of the value store electric power meter as 16 bit information every sixty seconds, the details of the electric power consumption for a week by adding seven total amounts of the daily electric power consumption together, and the details of the monthly electric power consumption by adding thirty total amounts of the daily electric power consumption to each other, monitors the surreptitious use of electric power or the abnormal consumption of electric power from a remote distance, and performs the electronic sealing. A scrambled bus 16 including a central processing unit (CPU) 162, a secure access module (SAM) 164 for keeping an encryption key and an encryption algorithm for storing credit value, and a store value module

20 (SVM) 166 for storing credit value, prevents the fabrication and use of credit value information, and hacking and excludes a cryptographical attack. A liquid crystal display LCD 17 displays the balance of the credit

25

30

value, a transmission state, a real time electric power consumption situation, and an accumulative electric power consumption situation so as to be distinguished visually by a user. A power line input and output terminal 18 is comprised of 1s, 2s, 2L, and 1L for connecting the input and output lines of the electric power to each other and a cover for preventing physical tapping. An arrester 19 is a circuit for absorbing lightning or a surge voltage.

An electric power meter for measuring electric power of a particular kind was described above. However, the electric power meter according to the present invention can measure the electric power of at least two kinds by including the voltage divider 6, the V-ADC 7, the I-ADC 8, the latch relay 1, and the shunt resistor 2 according to the kind of the electric power. Namely, when the voltage divider, the V-ADC, the I-ADC, the latch relay, and the shunt resistor are combined so that at least two kinds of power sources with different voltages can be selectively or simultaneously used, the respective amounts of current being additionally measured and operated.

The operation of the value store electric power meter having the above structure is described as follows. As mentioned by the electric power supplier or the electric power re-seller, the credit value from the host is stored in the SVM 166 of each terminal through the power line modem 13 using the credit value store method, each electric power meter calculates charge according to the amount of electric power consumption operated on by the electric power consumption operating circuit 9, compares the calculated charge with the balance of the credit value information stored in the SVM 166, and calculates the charge through the token exchanger 10. When a balance of not more than a certain amount is left in the SVM 166, the user is informed of the balance state by sounding a buzzer. When the balance is insufficient, the credit value is transmitted from the host to the SVM 166 by the above-mentioned credit value store method or the power supply is broken by operating the latch relay 1. The credit value information can be stored in the SVM 166 by

communication between the host and the terminal in the value store electric power meter according to the present invention. However, it is possible to transmit the electric power value information stored in the IC card 5 to the SVM and store the transmitted information in the SVM by inserting the electric, gas, water, and calorie IC card 5 for a family or an establishment to which a legally issued certain amount of money is recorded into the value store electric power meter according to the present invention.

That is to say, the electric power meter according to the present invention displays the information such as monthly consumption amount and card balance on the LCD 17 installed therein by using a certain amount of electric power in a value range recorded in the SVM, and sounds the buzzer 4 when the balance of no more than a certain amount is left in the card. Accordingly, the user requests the server to transfer the credit value. The credit value is automatically charged to an account of a previously contracted bank or settled by a credit card. The electric power value is received on-line through a power line and stored in the SVM 166. The value is reduced according to a power use scale.

Accordingly, the electric power supplier and the electric power reseller can save costs by omitting processes of reading a meter, inputting and calculating the amount of use, and printing and mailing a bill. A power bill is paid in advance. Accordingly a process of re-charging arrears is omitted. Also, it is possible to lower the power bill due to benefits from pre-payment interest, application of differential charges according to the electric power use time, and the cost saved in the difference between an electric power purchasing price and an electric power selling price. The electric power seller can manage a high value added business.

In order to prevent the use of a fabricated card other than an IC card legally issued by the electric power supplier or the electric power reseller, the SAM 164 for authenticating the card is loaded into the electric power meter. When the card is inserted into the terminal, the terminal

and the card authenticate each other. When the amount of money information on the card is transferred by the terminal as the credit value, the terminal operates according to the encryption process shown in FIG.

1. Accordingly, the use of the fabricated card is prevented. A method of  
5 volatilizing an encrypted key, thereby disabling the terminal, during the dismantling of the meter can be considered against the cryptographic attack of a hacker, for example, the dismantling of the value store electric power meter in order to fabricate the terminal or the card. However, the encryption algorithm and the encrypted key inside the terminal have only  
10 an amount reduction key in which the credit value information is reduced according to the amount of the power consumption. Accordingly, it is not possible to increase the money or the credit value information. In particular, in the present invention, when a user/a subscriber contacts an ARS server through a telephone or a digital interphone in order to request  
15 a transfer of credit value, the use amount is selectively settled using credit card or bank account. The value transferring process starts within a range in which the payment is guaranteed. The process can also be performed through Internet. In particular, it is possible to automatically transfer the value when the value stored by the account automatic  
20 transfer contract between the electric power seller/the electric power reseller and a financial institution is reduced to a certain scale, and for people who have never used a computer or information communication network. In particular, in the case of performing a payment request trade by an SET electronic trade process with a direct payment card, the server  
25 operating as a cybermall may put trade details into a digital envelop (DE), which has the effect of signing the trade details. Accordingly, the trade process cannot be denied or fabricated.

The realizing process and condition of the above-mentioned present invention will be described in detail hereinafter.

30 1) Processes of generating, transferring, and storing credit value  
Credit value information is generated by communicating and operating with the subscriber management database using the masterkey

(Mk) of the electric power seller or the electric power re-seller. The ID number of the subscriber which is requested by a power line LAN modem is selected through area service & surveillance (AS) and local service & surveillance (LS). When the request for the subscriber ID number and the communication are completed, the legality of the server and the terminal is authenticated by the above-mentioned authentication process. When the authentication is completed, the requested credit value information is transferred. The credit value information transmitted through the power line is stored in the store value module (SVM).

10           2) Processes of transferring and storing added value

The efficiency of the present invention is increased by adding an added value transfer function which can be used in connection with power, gas, water, calorie, and hot water meters operating off-line by the IC card without a separate communication line. The generation and transfer of the added value are performed by the above-mentioned processes of generating and transferring the value. The added value is stored in the IC card instead of the electric power meter. The added value information for things such as gas, water, hot water, and heat energy stored in the IC card can be operated on, inserted into IC card off-line water and gas meters which are compatible with the IC card provided in the Korean Patent Application Nos. 98-6947 and 98-6948 filed by the same applicant. Accordingly, the efficiency of management is maximized.

3) Consumption of credit value information

The credit value information stored in the SVM 166 is reduced in a token exchanger (TE) 10 according to the amount of power consumption. The token is reduced per unit time by several miliWatts, several watts, or several kilowatts. When the token of a minimum unit is exhausted, the credit value information is reduced by a process of requesting a new token.

30           4) Differential application of power consumption rate

An electric power use mode which can differentially apply multi-steps of electric power use rates according to time zones of weekdays

and weekends, seasons, and months in which the amount of credit value used is selected by a program and automatically applied. In the electric power consumption mode table 11 various rates can be differentially applied, according to the time zones and the characteristics of the supply and demand of electric power and electric power supply and use, for example, 100% at daytimes of weekdays, a discount of 75% before and after the daily work times of the weekdays, a discount of 50% at midnight, a premium of 200% at daily work times, and a premium of 300% at 2 to 4 p.m. in summer during which the use of air conditioners rapidly increases is applied by a real time clock (RTC). Since the separate TE 10 is applied with respect to the same amount of electric power use, the stored credit value is differentially applied. Accordingly, the consumption of electric power becomes optimal during each time zone. Thus, the efficiency of the supply and demand of electric power is maximized. Therefore, the electric power bill is reduced.

#### 5) Balance checking and automatic breaking

The credit value information of the SVM 166 is displayed on a display device such as liquid crystal so that a user can check the balance at any time. When the credit value is exhausted, the token exchanger informs the user that the last tokens are being used by sounding an alarm of an audible frequency. When the credit value is not re-charged before the last token is consumed, the supply of the electric power is broken by sending a break signal to the latch relay serially connected to the power line.

In order to satisfy the above-mentioned various realization processes and conditions, the present invention can be used in connection with the various gas and water meters where it is possible to transfer the added value by the IC card on the basis of the value transfer and value store electric power meter with which it is not necessary to read a meter based on the following structures and principles.

The value store electric power meter according to the present invention measures a voltage (V) and a current (A) in real time, calculates

the amount of electric power (W) using the electric power consumption circuit, measures the consumption of electric power per unit time, converts the stored value information into a token, reduces the token according to the amount of consumption of electric power per unit time in a token exchanger 10, and requests new credit value information when the token is exhausted. Also, all the information the user should know such as the amount of remaining credit value information and a power consumption state is displayed through a liquid crystal display screen 17. When the last credit value information is converted into token form, the user is informed by sounding an alarm having an audible frequency. Accordingly, the credit value is re-charged. When the inner credit value information is exhausted, the supply of the electric power is broken by breaking the latch relay 1.

In the mode table (MT) 11 by which it is possible to differentially apply the electric power rate by at least five steps, the real time clock (RTC) differentially applies the electric power rates of various steps such as 50%, 75%, 100%, 200%, and 300% according to the time zone and reduces the credit value information. Namely, though the same electric power is used per unit time, the credit value of the SVM is differentially reduced since the TE 10 applies multiple steps of electric power rates by a time program defined in the MT credit. Accordingly, the consumption of electric power becomes optimal during each time zone. Therefore, the supply and demand of electric power are well balanced. A discount benefit according to the selective use by the user is given by the multiple step electric power fare system. For example, a discount for night times at which the supply of electric power is excessive can lower the power supply reserve rate of the power supplier. When offices intensively use air conditioners in summer, a premium power fare is charged and a heat storage system is induced. Accordingly, it is possible to give a discount benefit to the electric power consumer such as a home or an establishment.

The value store electric power meter according to the present

invention has a scrambled data bus structure in which a CPU 162 and an inner memory cannot be read by a lay person in order to prevent the stored value from being fabricated and cryptographically attacked. The value store electric power meter is comprised of the secure access module (SAM) 164 into which the secret intrinsic key (KT[n]) and the encryption algorithm can be loaded and the store value module (SVM) 166. Should the hacker or the encryption attacker dismantle the electric power meter in order to fabricate the credit value information, the encrypted key and the encrypted algorithm of the SAM and the SVM cannot be seen. The SAM, the SVM and the master key (Mk) of a host computer are mutually authenticated. Thus, the SAM and the SVM can transfer and store the credit value information by the above-mentioned processes using the master key. The SAM and the SVM can store credit value information and added value information in the IC card using the master key. When the IC card is inserted into the electric power meter, an answer to reset (ATR) signal is received by sending a reset signal to the card, the IC card and the terminal are mutually authenticated, the credit value information is exchanged through the SVM and the SAM, and the credit value information is calculated with respect to the legal use of the IC card. The credit value information is recorded by a separately encrypted key (Mk) of an issuer. Therefore, it is not possible to increase the credit value. Such processes are performed in compliance with the international standard organization (ISO) 7816 Part1, Part2, Part3, Part4, Part8, and Part10 and contain a physical standard, an electric signal, a communication protocol, and an encryption process. At least two encrypted keys are stored according to the request of the manager. One encrypted key is updated by a distance of a certain time. The encrypted key is selectively used. Accordingly, the fraudulent use of the credit value is prevented.

The transferal of the credit value and the added value and the monitoring of the legal use of the value are performed through an electric power modem. A power consumption sensor circuit is provided and



power use information is recorded in a non-volatile memory (NVM) 15 in order to monitor the surreptitious use of electric power and punish illegal use without having to visit a place in which an electric power meter is installed and checking lead or tartar sealing. Such a circuit can be  
5 periodically monitored by the LS and the AS, thus performing an electronic sealing function without checking the physical lead sealing.

The value store electric power meter has a value store power meter serial number (SVPMSN) of 3 bytes. The electric power modem 13 communicates with the LS by a modem identification number (M-ID)  
10 address of 1/256. When the server of the electric power seller or the electric power re-seller sees a request to transfer the value, it starts a short-distance communication with the value store electric power meter of the subscriber according to an addressing process for selecting the M-ID of the subscriber.

15 The subscriber requests the transfer of credit value by contacting the ARS of the electric power seller or the electric power re-seller by telephone or a digital interphone 20 and a keypad 21, selecting the settlement by credit card or bank account, and selecting the payment of the transferred electric power credit value. Then, a credit value managing  
20 server is requested to transfer the credit value by the AN given by the server of a credit card company. The credit value managing server of the electric power seller calls the M-ID through the AS and the LS, transfers the credit value to the SVPM and stores the transferred credit value by performing the above-mentioned value storing processes.

25 The LS sequentially monitors the power consumption state of up to 256 value store electric power subscribers through the electric power modem connected to the 117V/220V electric power line at a maximum distance of 3Km. The LS sequentially calls SVPMs of address 1/256 . . .  
n/256, checks and re-controls the internal real time clock change state of  
30 the SVPM, controls a rate system mode, checks the CSN of the card, backs up the balance of the credit value, checks the presence of surreptitious and abnormal use of electric power, and downloads reports

on the electric power consumption during days, weeks, or months, thus totalizing and estimating demand for electric power. The totalization and estimation results are used as guides for negotiating the price of purchasing electric power and re-controlling the price of supplying electric power.

In the transferal and storage of the credit, the gas, water, heat and hot water meters other than the electric power meter consist of a meter which operates off-line by using the IC card, without a separate communication line since these installation environments are inferior and a line construction is very complicated. When the added value information transferred through the value store electric power meter is stored on the IC card and the IC card is inserted into the water, gas, and heat meters, added value information is stored in each meter. The tokens are reduced by the same credit value reducing processes. When the credit value information is exhausted, a valve for stopping the supply of gas, water, heat, and hot water is closed. The efficiency of the present invention is increased with the added value transferring function in which it is possible to use the value transfer and store electric power meter together with the added value service. The added value is generated and transferred by the same processes of generating and transferring the credit value. The added value is stored on the IC card instead of in the electric power meter. The added value information for things such as gas, water, hot water, and heat, is stored on the IC card by performing the above processes, and can be transferred into the IC card off-line water and gas meters which can hold the IC card provided in Korean Patent Application Nos. 98-6947 and 98-6948.

Hereinafter, credit value transfer request and processes in the electric power modem will be described with reference to FIG. 6.

A subscriber IC card 52 is issued to those who wish to receive the IC card, by using a master key IC card 51 of the system manager in an electric power re-seller 50. After settling the credit value for things such as electricity, gas, water, hot water, and heat energy in cash or by credit

card on the spot, a first credit value is stored on the IC card. The electric power credit value on the card is stored in the electric power meter by inserting the IC card into the value store electric power meter of a user 55. When the IC card is inserted into the gas, water, hot water and heat energy meters of the user 55, the credit value is stored in each meter. After the first credit value storage, further credit value/added value storage is performed by the value transferring process using the electric power modem. The value transferring and storage can be performed using the telephone, the Internet, a P-ATM (EMV '96), and the value store electric power meter. The processes of transferring and storing the value are performed with the above-mentioned encrypted algorithm forming. The credit value/added value transferring channel is as follows. The subscriber record information is taken from the subscriber database of the host server of the electric power re-seller 50. The payment to a bank or a VAN company is guaranteed, by a user selecting one among a credit card number, a direct payment card number, and a bank account number. The credit value information is encoded by the master key of the SAM. The ID of the subscriber value store electric power meter is called through the AS and LS networks. The SAM and the master key are mutually authenticated. Then, the credit value/added value information is transferred. The local surveillance unit (LS) downloads the electric power use record for a period of hours, days, weeks, or months from the value store electric power meter, monitors the state of electric power use and the balance of credit value on an hourly or daily basis, resets time, downloads the electric power use mode and program, and monitors the surreptitious and abnormal use of the electric power. Also, the amount of money calculation is performed between an amount of money calculation system 54 of an electric power seller 53 and the electric power re-seller 50 by a method similar to the above-mentioned processes.

FIG. 7 is an exploded perspective view showing the outer shape of the value store electric power meter according to the present invention. The value store electric power meter according to the present invention

includes an LCD display 17 on the upper portion of a front surface and an input and output terminal 66 on the lower portion of the front surface.

The input and output terminal 66 is connected to the electric power line for inputting and outputting electric power and is covered with a  
5 surreptitious use prevention cap 64. A digital interphone 20 and a value transfer requesting key pad 21 are provided on the upper surface of the surreptitious use prevention cap 64. Also, an IC card inserting slit 60, into which the IC card is inserted, is formed in one side of the electric power meter. The credit value is stored in the IC card and is read from the IC  
10 card when it is inside the IC card inserting slit 60. Also, a surreptitious use/dismantle checking sealing unit 62 for sealing the electric power meter so that electric power cannot be surreptitiously used, is part of the electric power meter.

As described above, the present invention has been described only  
15 with respect to the value store electric power meter via the power line modem. Mutual necessary information can be exchanged via power line modem communication between the server and the terminal. A general telephone line, a radio frequency relay communication line, and a cable TV line can be used instead of the power line.

20 As mentioned above, according to the present invention, it is possible to reduce visiting personnel expenses by omitting the process of reading meters for things such as electric power, gas, water, and heat energy, compute processing expenses, print and mail bills, and bill for mailing expenses.

25 Also, it is possible to reduce loss due to uncollected electric power bills and arrears, and to give added value since the credit value is paid for in advance by a credit card or from a bank account. Accordingly, a power supplier can give a high added value.

### 30 Industrial Applicability

The present invention describes a composite electric power meter with which it is possible to solve the economic and security problems of

having to visit and visually examine a conventional remote electric power meter.

What is claimed is:

1. A method for storing credit information in a value store module in a value store electric power meter by communication between a host and each terminal through an electric power modem included in the value store electric power meter which is a terminal, comprising the steps of:
  - (a) the host generating first random data, sending the first random data to a terminal, generating a session key by a key generating algorithm using a terminal intrinsic secret key, generating a first signature value by a signature generation algorithm for a comparison during a terminal authentication, and the terminal receiving the first random data and generating the session key by the same method as the host;
  - (b) the terminal generating a second signature value by a signature generating algorithm and second random data and sending the second random data to the host;
  - (c) the host comparing the first and second signature values and authenticating the terminal, the host generating a third signature value and sending the third signature value to the terminal with information on an amount of money when the terminal is authenticated and the terminal receiving the third signature value and the information on the amount of money from the host, generating a fourth signature value, and authenticating the host by comparing the third and fourth signature values with each other; and
  - (d) the terminal increasing the value by decoding the information on the amount of money and sending the value obtained by encrypting a balance and a terminal ID using an encrypting algorithm to the host and the host receiving the encrypted value, decoding the encrypted value, comparing the stored terminal ID with the decoded terminal ID, authenticating the terminal once again, and backing up the balance in a record file when the authentication is completed.

2. The method of claim 1, further comprising an electric power

charge system conversion step including the sub-steps of:

(a1) the host generating first random data, sending the first random data to a terminal, generating a session key by a key generating algorithm using a terminal characteristic secret key, generating a first  
5 signature value by a signature generation algorithm for a comparison during a terminal authentication, and a terminal receiving the first random data and generating the session key by the same method as the host;

(b1) the terminal generating a second signature value by a signature generating algorithm and second random data and sending the  
10 second random data to the host;

(c1) the host comparing the first and second signature values and authenticating the terminal, the host generating a third signature value and sending the third signature value to the terminal with mode  
15 information when the terminal is authenticated and the terminal receiving the third signature value and the mode information from the host and generating a fourth signature value; and

(d1) the terminal authenticating the host by comparing the third and fourth signature values with each other, and the terminal converting a rate  
20 system, generating an encrypted value obtained by encrypting the mode information and the terminal ID using the encrypting algorithm and sending the encrypted value to the host and the host receiving the encrypted value, decoding the encrypted value, comparing the stored terminal ID with the decoded terminal ID, authenticating the terminal once  
25 again, and backing up the balance in a record file when the authentication is completed.

3. The method of claim 2, further comprising a use information check command step including the sub-steps of:

(a2) the host generating first random data, sending the first random  
30 data to a terminal, generating a session key by a key generating algorithm using a terminal characteristic secret key, generating a first signature value by a signature generation algorithm for a comparison

during a terminal authentication, and a terminal receiving the first random data and generating the session key by the same method as the host;

(b2) the terminal generating a second signature value by a signature generating algorithm and second random data and sending the second random data to the host;

(c2) the host comparing the first and second signature values and authenticating the terminal, the host generating a third signature value and sending the third signature value to the terminal with time information when the terminal is authenticated and the terminal receiving the third signature value and the time information from the host, generating a fourth signature value; and

(d2) the terminal authenticating the host by comparing the third and fourth signature values with each other, and the terminal sending the value obtained by encrypting a logfile of use details using the encrypting algorithm and sending the encrypted value to the host and the host receiving the encrypted value, decoding the encrypted value, comparing the stored terminal ID with the decoded terminal ID, authenticating the terminal once again, and backing up information on use during days, weeks, and months and a timer in a record file when the authentication is completed.

4. A value store electric power meter including an electric power line input and output terminal for measuring the amount of used electric power, comprising:

an electric power consumption operating portion for measuring the voltage and current of an electric power line and calculating used electric power;

an electric power modem for performing data communication between the host and the terminal through the electric power line;

a secure storing portion including a secure access module (SAM) having a CPU and an encryption key and an encryption algorithm for storing value and a store value module (SVM) for storing value, for



preventing the fraudulent use of the value information and hacking,  
excluding a cryptographical attack, and requiring the authorization process  
of the SAM in requesting a token from the SVM;

an on/off latch relay switch for breaking the supply of electric power  
5 according to the balance result of the SVM; and

a token exchanger for reducing a token from the value information  
input from the SVM according to the amount of electric power consumed  
per unit time, the SVM requesting a new token to a token tank when an  
inner token is exhausted.

10

5. The value store electric power meter of claim 4, further  
comprising an IC card reading and recording portion to allow use with  
other meters such as water, gas, and calory meters by inserting an IC  
card into the electric power meter, receiving value from the host on-line,  
15 recording the received value on the inserted IC card, and reading the  
received value from the IC card.

6. The value store electric power meter of claim 5, wherein the  
IC card reading and recording portion is applied to water, gas, and heat  
20 meters employing an IC card method operated in an off-line state by  
recording added value for things such as gas and water in the IC card  
through the electric power modem, by which it is possible to store electric  
power value in the IC card by including a communication port comprised  
of eight terminals defined by the ISO 7816 Part 2 having Vcc, Clk, DIO,  
25 Reset, and Gnd for synchronously and asynchronously communicating  
with the IC card.

7. The value store electric power meter of claim 4, further  
comprising:

30 an AC/DC converter for supplying an operation voltage required by  
the electric power meter;

a power consumption sensor for sensing that the electric power is

normally used when the output of a sensor is "0" and that terminals are bypassed and the electric power is surreptitiously used when the output of the sensor is "1"; and

a buzzer for generating an audible alarm and guiding a user to perform value transfer and storage when a last token is received by requesting a new token from the SVM after the balance of the token exchanger is exhausted.

8. The value store electric power meter of claim 4, wherein the electric power consumption operating portion comprises:

a shunt resistor for measuring an amount of AC current;

a voltage divider for serially connecting two resistors and selecting from a voltage range given by the ratios of the two resistors in order to adjust the AC voltage of the electric power line within the range of the input voltage of a voltage meter;

an analog to digital converter for converting an AC current signal which flows through the shunt resistor into a digital signal of 16 or 20 bits; and

an analog to digital converter for converting an AC voltage into a digital signal of 16 bits,

wherein the phase of the voltage is compared with the phase of the current and an angle by which the two phases are different from each other is calculated and output as a signal for applying differential rates.

9. The value store electric power meter of claim 4, further comprising an electric power consumption table which is an electric power fee mode table for differentially applying multiple step electric power use rates such as 50%, 75%, 100%, 150%, and 200% according to electric power supply and demand states on the basis of a real time clock comprised of year, month, time, minute, and second.

10. The value store electric power meter of claim 4, comprising

a non-volatile memory storing a characteristic 3 byte ID number and recording an electric power use state during a certain period of hours, days, or months for remotely monitoring the surreptitious or abnormal use of electric power and performing an electronic sealing function.

5

11. The value store electric power meter of claim 4, comprising an LCD display for visually displaying the balance of the value, the transfer state of the value, the real time electric power consumption status, and the accumulative electric power use states.

10

12. The value store electric power meter of claim 5, wherein the value store electric power meter which can be used for simple and sound fee payment means by a SET electronic commercial transaction process using next generation credit and direct payment cards of EMV '96 mixed with the IC card reader and recorder, further comprises:

15

means such as a telephone, an Internet, a P-ATM (EMV '96), and a digital interphone for performing audio communication with a person in charge of the host server or transmitting an audible message to help the user with matters such as storage; and

20

a keypad for a user directly requesting the value to be stored.

13. The value store electric power meter of claim 4, wherein the electric power input and output terminal of the electric power meter comprising a cover and physical sealing for preventing physical tapping, prevents the surreptitious and abnormal use of electric power.

25

14. The value store electric power meter of claim 4, further comprising an arrester circuit for absorbing lightning or a surge voltage on an electric power line of a supplier.

30

15. The value store electric power meter of claim 4, wherein the electric power line of a transformer for reducing 3.3KV to a generally used

voltage of 110V/220V/240V further comprises a current transformer for measuring the total amount of current,

wherein the electric power meter is network connected to local service & surveillance units (LSs) having power modems for

- 5 communicating with a maximum of 256 value store electric power meters on the electric power line and an area service & surveillance unit (AS) for managing a maximum of 256 LSs.


16. The value store electric power meter of claim 15, wherein  
10 the host further comprises a server for an electric power seller and an electric power re-seller for issuing an IC card to a subscriber with the use of an IC card having a master key, automatically transferring value when the subscriber requests the value to be stored, monitoring and managing the legal use of the value of the subscriber, totaling and analyzing the  
15 detailed electric power status of the subscriber, thus re-determining a price in purchasing the electric power,

- wherein each server connected to a plurality of ASs manages and monitors the value transfer and store electric power meter which can be connected to the ASs and LSs in a tree structure and stores value in the  
20 value transfer and store electric power meter.

17. The value store electric power meter of claim 15, further comprising a voltage divider, a voltage analog-to-digital converter, a current analog-to-digital converter, a latch relay, and a shunt resistor so  
25 that if at least two kinds of electric power sources selectively use other voltages or simultaneously use at least two kinds of voltages, it is possible to separately measure and operate the respective amounts of current.


1/6

FIG. 1

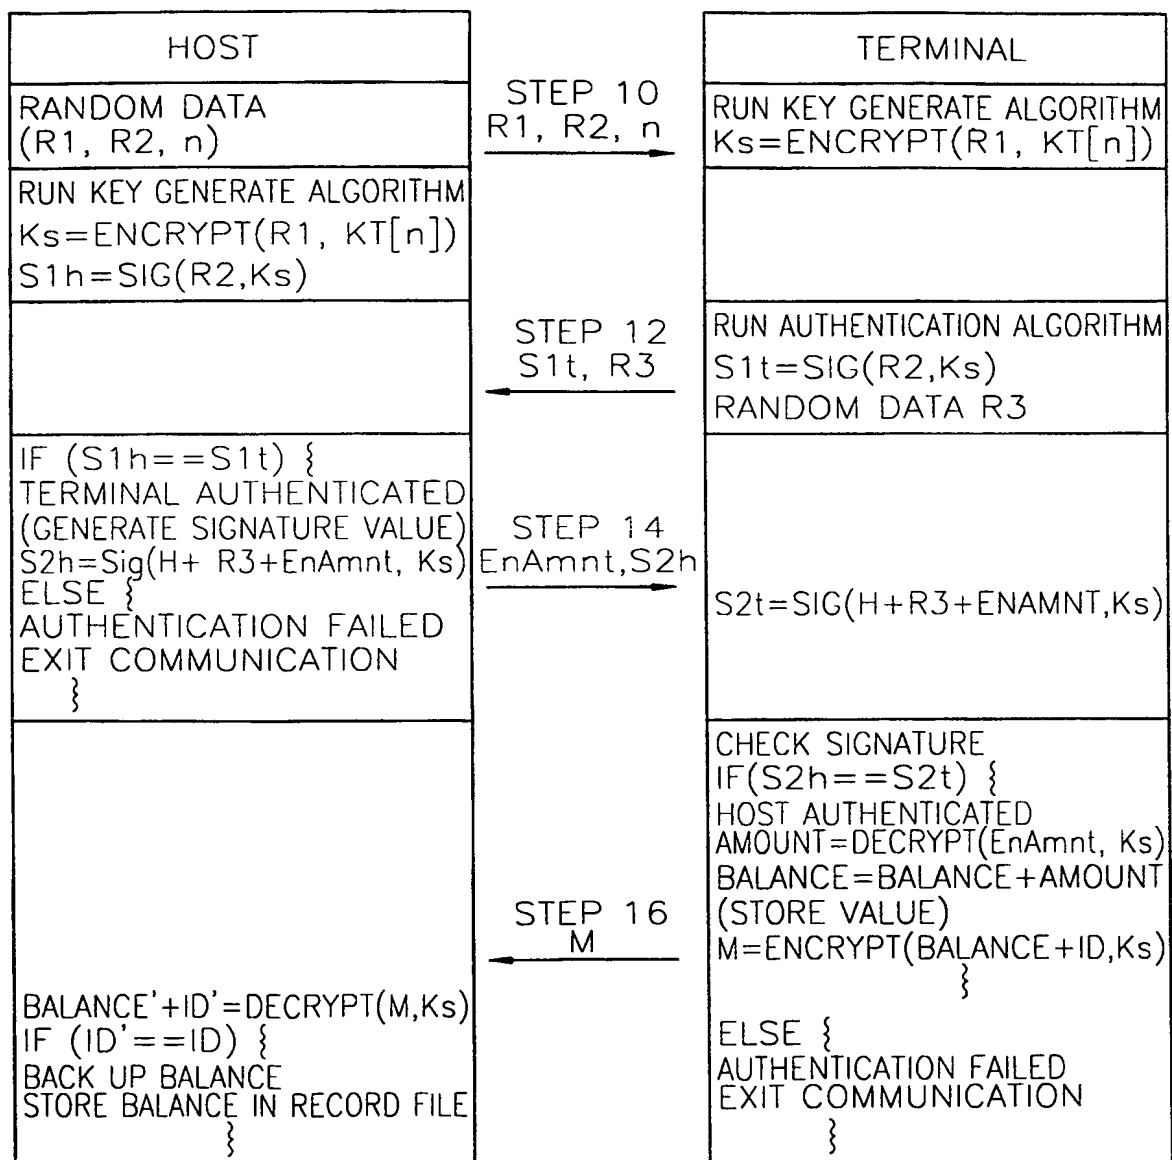


2/6

FIG. 2

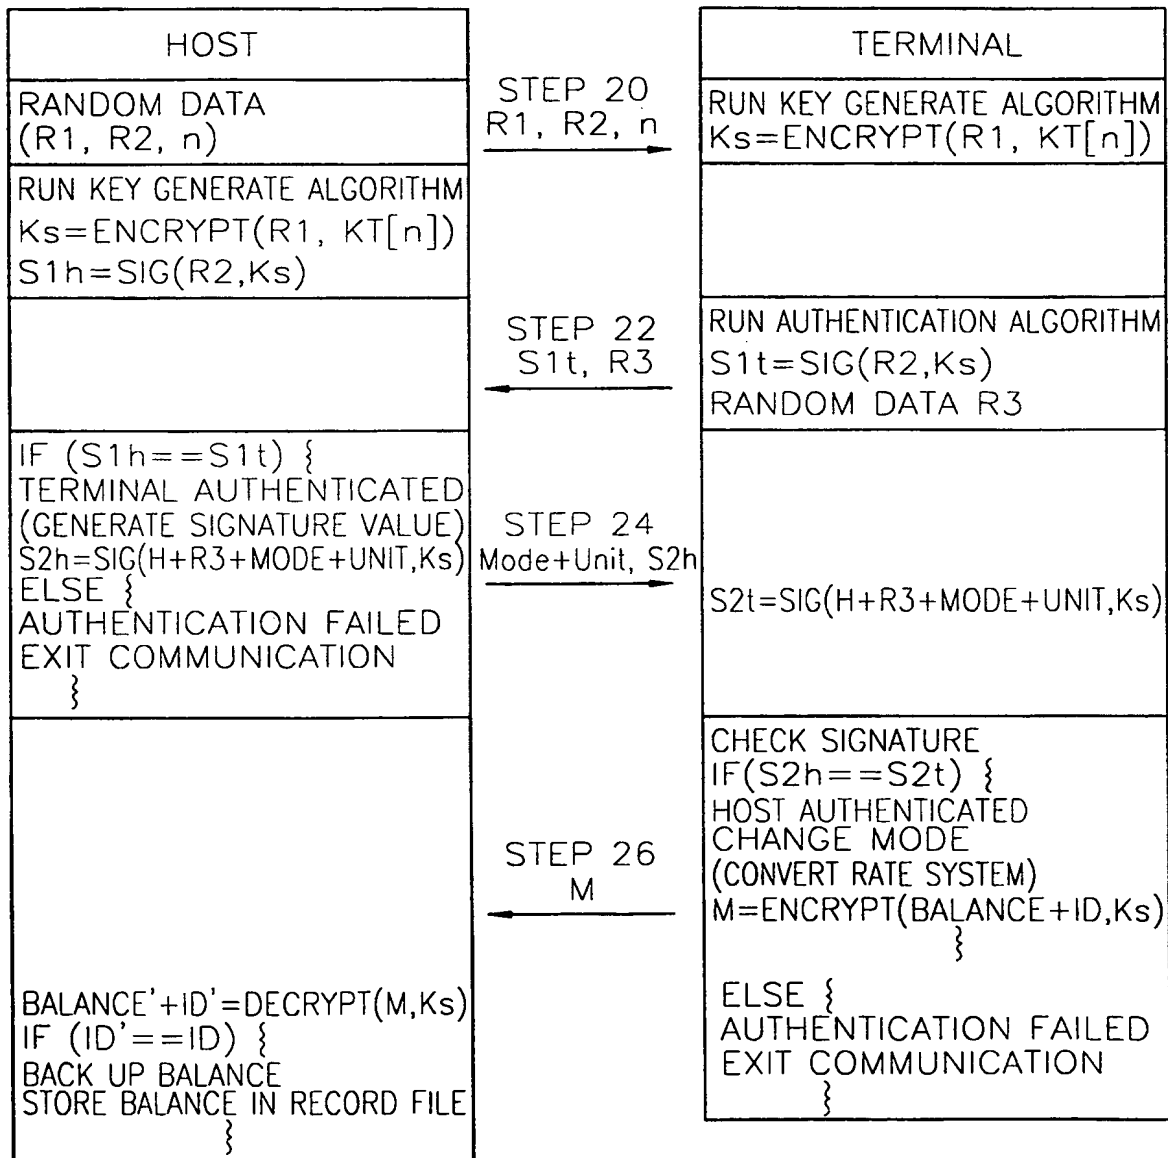


3/6

FIG. 3

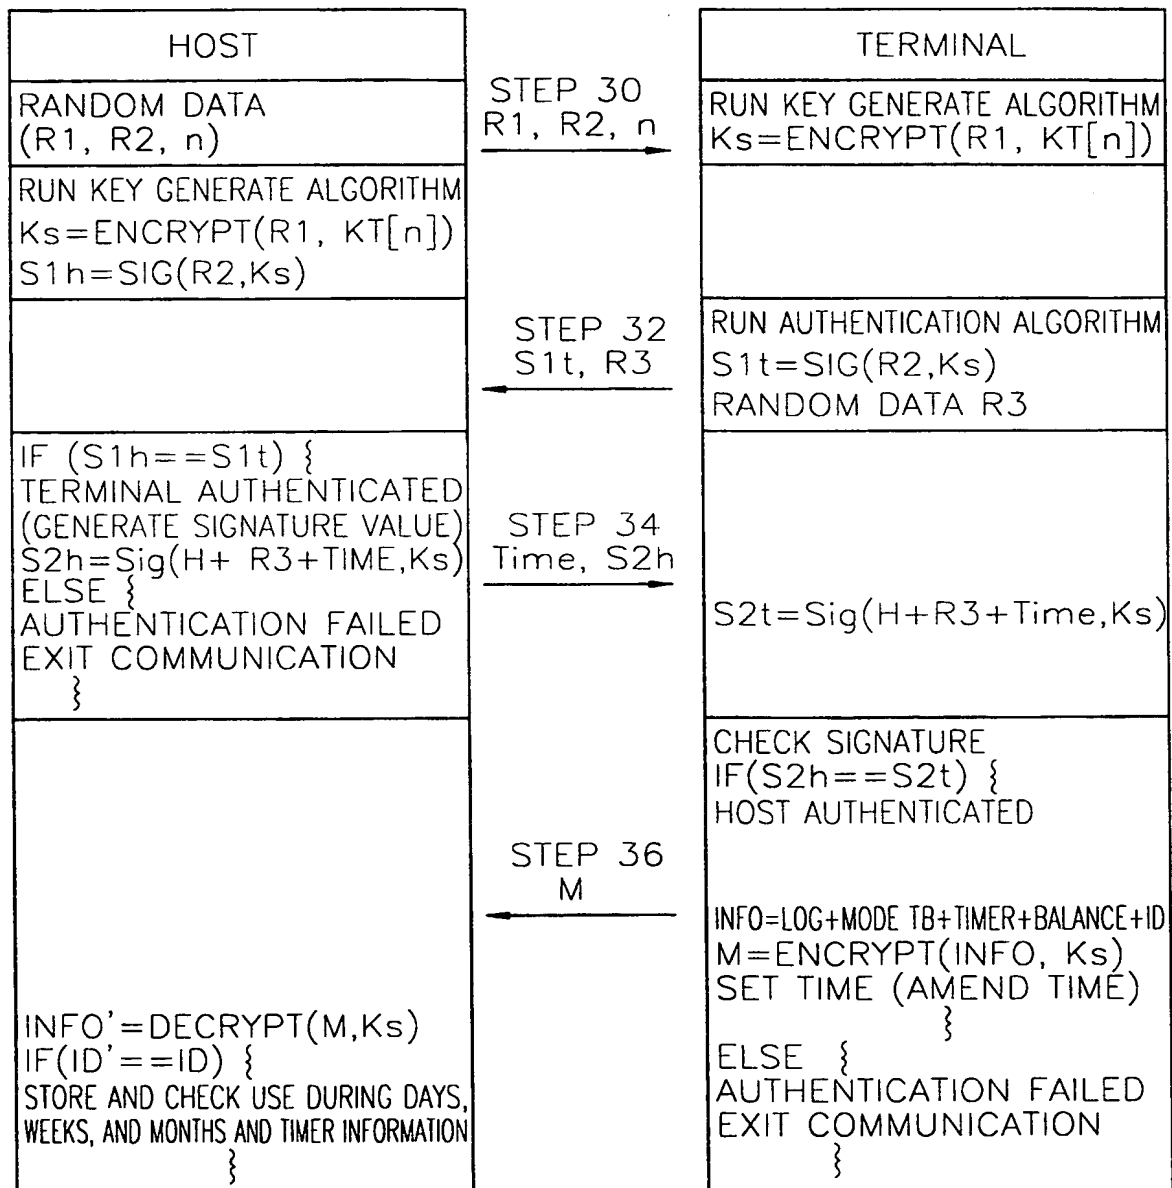

4/6

FIG. 4

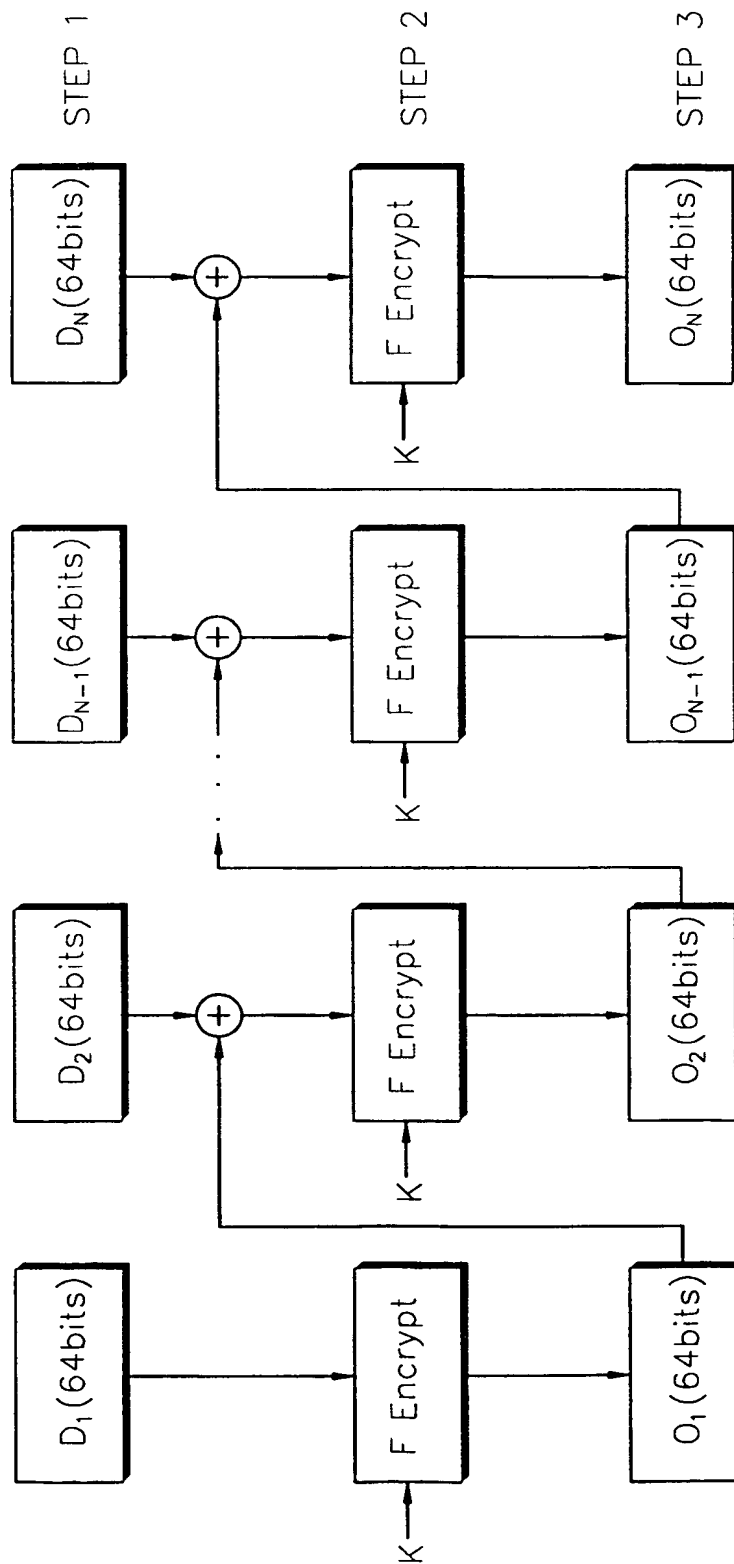



5/6

FIG. 5


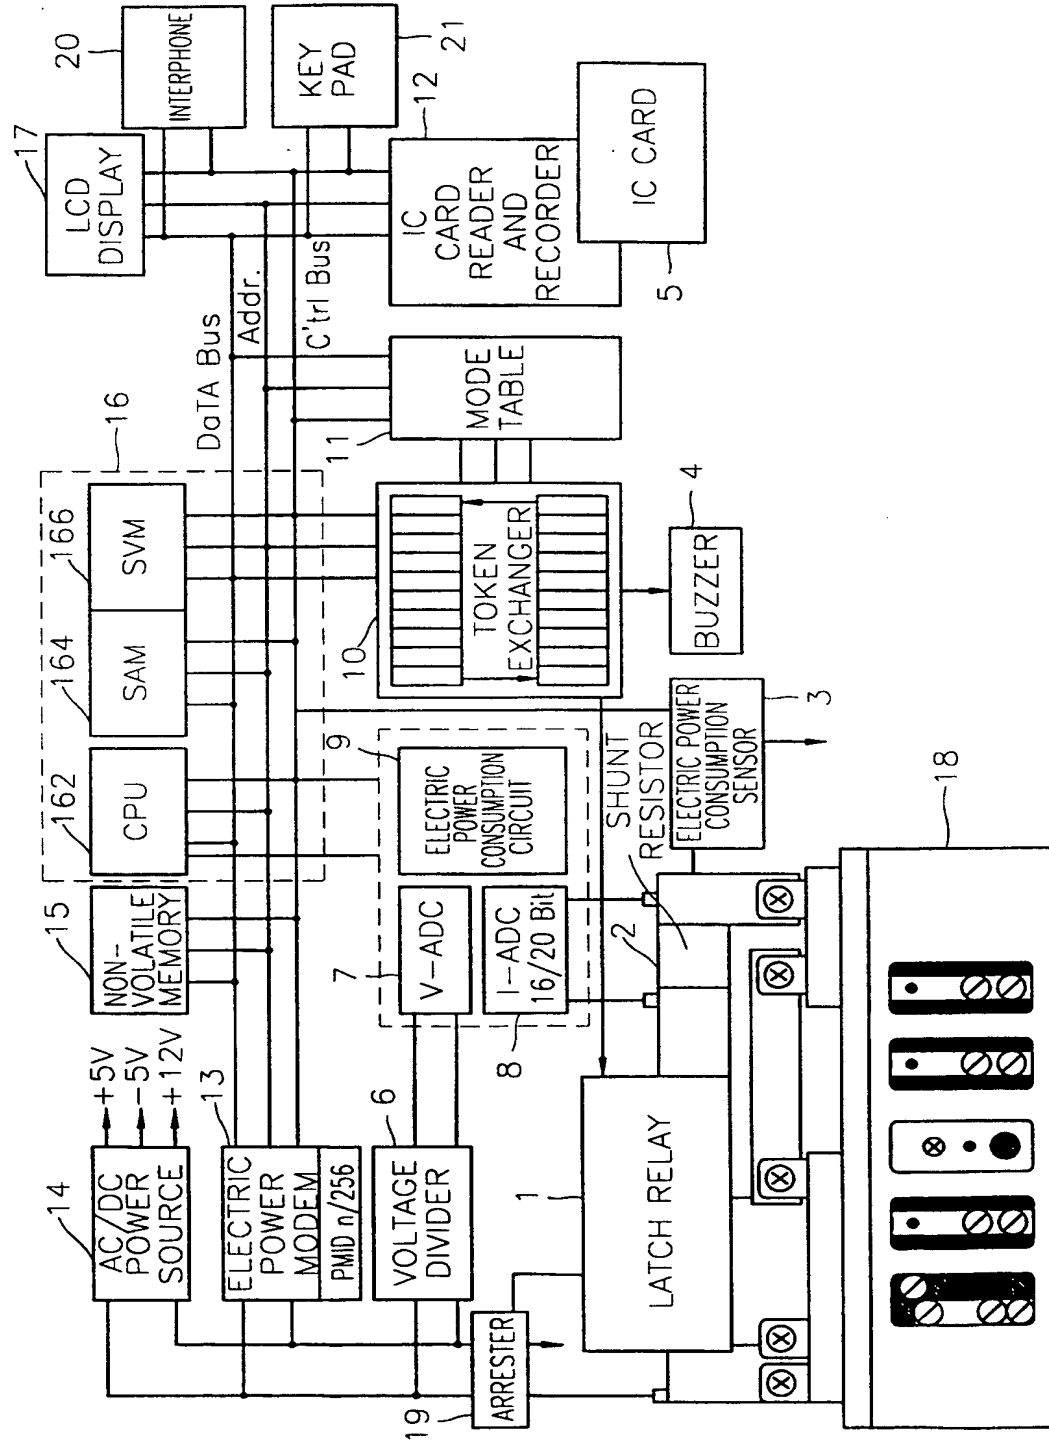


FIG. 6

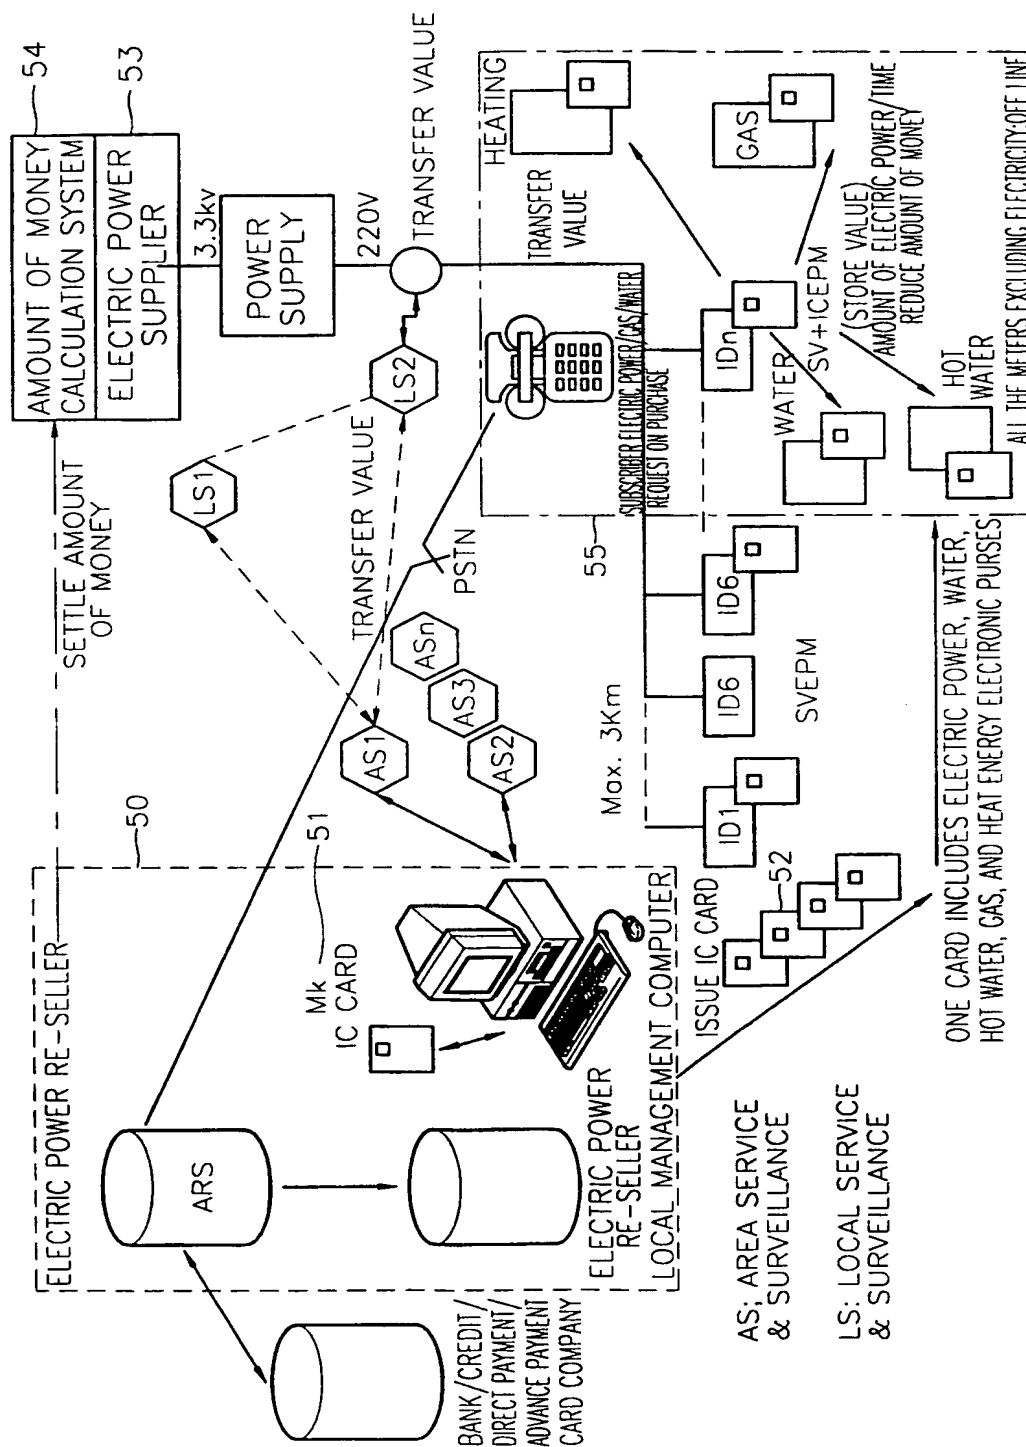

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/KR 99/00233

## A. CLASSIFICATION OF SUBJECT MATTER

IPC<sup>6</sup>: G 01 R 1/30, 11/00, 11/02, 11/04, 11/32, 21/133, 22/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC<sup>6</sup>: G 01 R 1/00, 11/00, 21/00, 22/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A,P	GB 2 324 610 A (AMPY AUTOMATION-DIGILOG LTD.), 28 October 1998 (28.10.98), abstract; fig.6,7; claims 1-20; page 1, line 11 - page 4, line 3.	1-17
A	US 5 590 179 A (SHINCOVICH et al.), 31 December 1996 (31.12.96), abstract; fig.5-9; claim 1; column 2, line 43 - column 3, line 48.	1-17
A	GB 2 295 681 A (SIEMENS MEASUREMENTS LTD.), 05 June 1996 (05.06.96), fig.1,2,5; abstract; claim 1; page 1, line 3 - page 4, line 24.	1-17
	----	

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents:

„A“ document defining the general state of the art which is not considered to be of particular relevance

„E“ earlier application or patent but published on or after the international filing date

„L“ document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

„O“ document referring to an oral disclosure, use, exhibition or other means

„P“ document published prior to the international filing date but later than the priority date claimed

„T“ later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

„X“ document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

„Y“ document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

„&“ document member of the same patent family

Date of the actual completion of the international search

15 July 1999 (15.07.99)

Date of mailing of the international search report

01 September 1999 (01.09.99)

Name and mailing address of the ISA/AT  
Austrian Patent Office  
Kohlmarkt 8-10; A-1014 Vienna  
Facsimile No. 1/53424/200

Authorized officer

Berger

Telephone No. 1/53424/453

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR 99/00233

In Recherchenbericht angeführtes Patentdokument Patent document cited in search report Document de brevet cité dans le rapport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication	
GB A	2324610	GB A0 9708413 GB A0 9801698 GB A1 2324610	18-06-1997 25-03-1998 28-10-1998	
US A	5590179	31-12-1996	AU A1 62391794 AU B2 681384 BR A 9405758 CA A4 2155539 GB A0 9516284 GB A1 2292044 GB A0 9626662 GB A1 2305333 GB B2 2292044 GB B2 2305333 JP T2 8510052 WD A1 9419899	14-09-1994 28-08-1997 28-11-1995 01-09-1994 11-10-1995 07-02-1996 12-02-1997 02-04-1997 09-07-1997 09-07-1997 22-10-1996 01-09-1994
GB A	2295681	EP A2 715171 EP A3 715171 GB A0 9424461 GB A0 9501771 GB A0 9501772 GB A1 2295681 GB A1 2295682 GB A1 2295683 GB B2 2295683 IL A0 116219 IL A1 116219 US A 5668538 ZA A 9510237	05-06-1996 28-05-1997 18-01-1995 22-03-1995 22-03-1995 05-06-1996 05-06-1996 05-06-1996 26-05-1999 31-01-1996 15-06-1998 16-09-1997 12-06-1996	